model no:

PTD200-SINGLE

DISPENSER HOLDER BRACKET

customer service:

ASSEMBLERS: If you find any parts missing or damaged, or if you're having difficulty assembling your furniture/equipment, call us at:

* Before calling, have your product model number available.

1-800-253-8619 (Inside U.S.A.) 260-352-2102 (Outside U.S.A.) Monday thru Friday, 8:00 AM - 4:30 PM Eastern Time (EXCEPT HOLIDAYS)

maintenance:

Regular inspection and maintenance of all parts, and fasteners is necessary. Tighten all bolts and nuts. Inspect Tops, Seats, Legs, Braces and Fasteners periodically for wear or vandalism. Replace broken or worn parts immediately or take equipment out of service until repairs are made. Use genuine Wabash Valley replacement parts.

To restore plastisol coating to its luster after prolonged use, wash/rinse/dry and use Armor-All ® or similiar quality vinyl protectant.

KEEP THIS ASSEMBLY/SPECIFICATION SHEET FOR FUTURE REFERENCE.

specifications:

NOTE: We reserve the right to change specifications without notice.


Heat fused poly—vinyl coating, finished on inner—metal structure, to an approximate 3/16" thickness. Framework assemblies are finished with powder coating; electrostatically applied and oven cured according to powder manufacturer's specifications. Fasteners are stainless steel to resist corrosion.

DISPENSER HOLDER:

Top and lower plates consist of 10 gage sheet steel. The upright bar and spacer is 1/2" x 1 1/2" flat bar steel. The bottle holders consists of 12 gage x 4" diameter mechanical steel tubing. The rod used at the bottlem of the bottle holder tubing is 1/4" diameter steel rod.

GENERAL:

Ground space requirements for Dispenser Holder with the trash receptacle are: $25 \ 7/8" \times 25 \ 3/8"$. Approximate height with trash receptacle is 64".

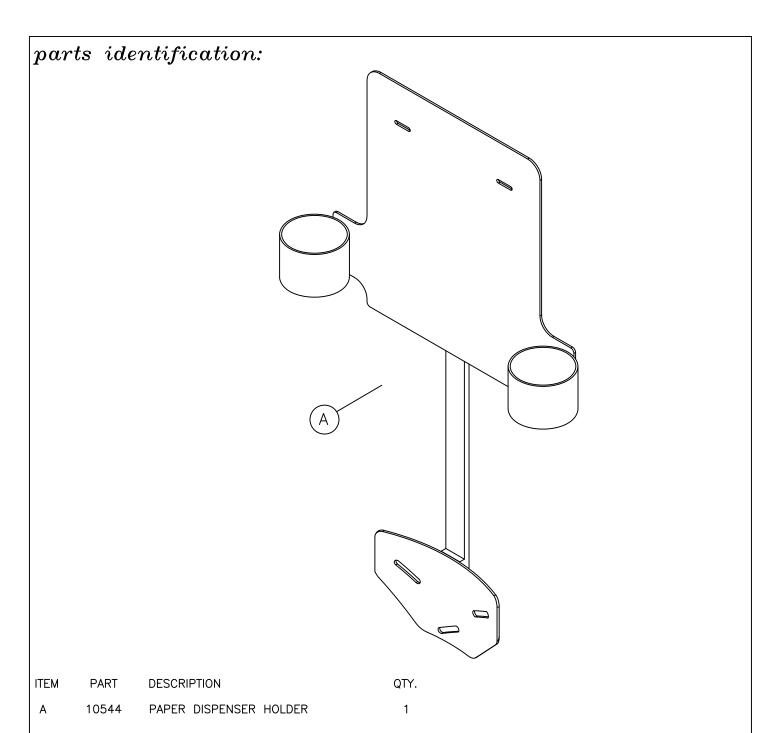

hardware identification: #21197 ITEMS INCLUDED IN HARDWARE PACKAGE: QTY. ITEM PART **DESCRIPTION** 3/8 X 7/8 FLAT WASHER SS 5/16-18 HEX NUT SS В 17028 6333222 CDEFG 17032 17050 5/16 LOCK WASHER SS ASSEMBLY TOOLS REQUIRED: 1 - PHILLIPS SCREWDRIVER 1 - 7/16" WRENCH 2 - 1/2" WRENCHES 5/16-18 X 1 HEX CAP SCREW SS 17094 1/4 LOCK WASHER SS #12-24 X 1 PAN HEAD PHILLIPS SS #12-24 FINISH NUT SS 17079

17123 17124

$assembly \ procedures:$ IMPORTANT: Assemblers should be reasonably skilled in the assembly of commercial grade/heavy duty fabricated steel equipment.

To ensure proper assembly, it is suggested that you take adequate time to locate and identify each part. To prevent scratching of the finished pieces, we recommend this unit to be assembled on a clean, flat, solid, surface with a drop cloth, allowing plenty of working room. Also please read the instructions and study the sketches very carefully. A little extra time spent before assembly will be well worth it in performing a complete, proper assembly. Please note that all parts have been precut and pre-drilled.

During the assembly process leave all bolts and nuts "finger tight", until the entire unit is completely assembled. This allows room for movement to level or adjust all seats, tops, benches, framework and braces if necessary. After final adjustment and leveling, permanently tighten all nuts, bolts and fasteners.

DISPENSER HOLDER INSTRUCTIONS W/ TRASH RECEPTACLE

STEP


Align the Dispenser Holder slots with openings in trash receptacle. Hold in place and bolt to trash receptacle using three (E) 5/16" x 1" Hex Cap Screws and three (B) Flat Washers under hex head. While holding bolts in position secure Dispenser Holder with three (B) 3/8" Flat Washers, three (D) 5/16" Lock Washers and three (C) 5/16" Hex Nuts.

STEP 2

Position Dispenser Holder vertically and tighten all bolts with proper tools.

STEP 3

Top slots in Dispenser Holder are provided for installation of a Paper Dispenser. Use the (G) #12-24 x 1" Screws to attach a Paper Dispenser of choice. Secure with (H) #12-24 Finish Nuts and (F) 1/4" Lock Washers.

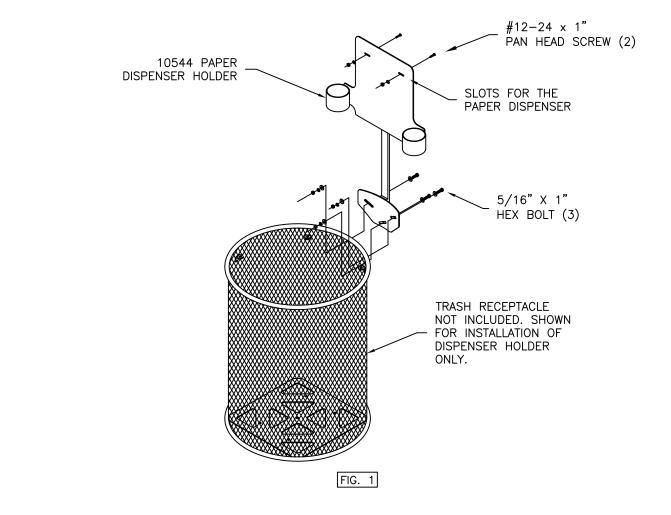

installation: WARNING: The proper installation for Wabash Valley products may depend upon many factors unique to the site, location, or use of a particular product. Consult with your contractor or other professional to determine your specific installation requirements.

